
Idaho Central Vacuum AIRMASTER®




SPECIFICATIONS FOR MODEL

A715h

#A1185LH 120 VOLT

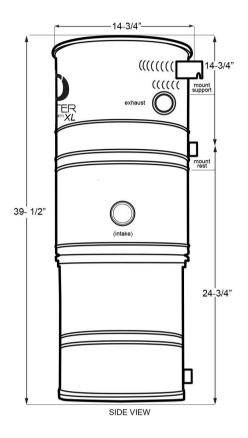

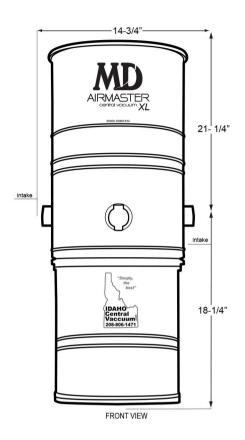

PERFORMANCE

 Sealed Vacuum
 150"

 CFM
 136

 Air Watts
 718

 Volts
 120

 Amperage
 14.9

 Quietness
 68dBA

 Coverage
 10.000 ft²

*Recommended home size can be higher or lower when considering these factors: altitude, hours of use, complexity of pipe installation, distance of furthest inlet, noise level, type and size of filtration, and budget.

FEATURES

Motor: Single 2-stage 8.4" by-pass horned

motor producing high CFM & waterlift.

Filtration: Tru-Seal™ Microfiltration disposable 8-gallon bag,

closed top.

Intakes: Right & left intakes. Utility Valve.

Construction: Durable powder-coated all steel body.

Overload: Heat protection resettable minibreaker.

Warranty: 10 Years Transferable + Lifetime.

Dims/Weight: 14- 3/4" Diameter, 39- 1/2" Tall, 45 lbs.

Accessories: All MD accessories and kits are compatible and

are sold separately.

Includes: Muffler and Venting Pipe.

INSTALLATION

Electrical:

120V 50/60HZ, 20 amp circuit. Separate circuit recommended. 6' Cord with typical 120v plug. Fits NEMA 5-20R receptacle.

Mounting:

Two-stud 17" wide bracket. Easy to hang and remove. Left/right variable positioning. Mount 6" off ground. Leave 24" above unit.

Venting:

Exterior venting not necessary. 30ft maximum line if venting.

PROJECT	LOCATION
DEALER	DATE / PRICE

