
Idaho Central Vacuum SILENTMASTER®




SPECIFICATIONS FOR MODEL

5720r2

#S2254ND 240 VOLT

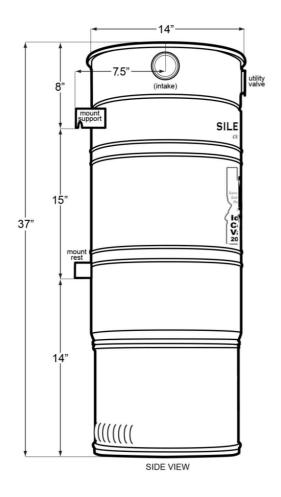

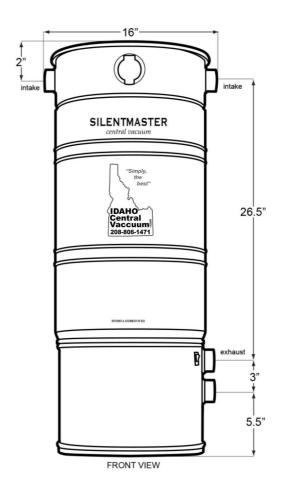

PERFORMANCE

 Sealed Vacuum
 .95"

 CFM
 .208

 Air Watts
 .722

 Volts
 .240

 Amperage
 9.8

 Quietness
 .62dBA

 Coverage
 8,000 ft²

*Recommended home size can be higher or lower when considering these factors: altitude, hours of use, complexity of pipe installation, distance of furthest inlet, noise level, type and size of filtration, and budget.

FEATURES

Motor: Two 2-stage radial bypass motors

producing high CFM.

Filtration: Tru-Seal™ Microfiltration disposable

8-gallon bag, closed top.

Intakes: Right & left intakes. Utility valve.

Construction: Durable powder-coated all steel body.

Overload: Heat protection resettable minibreaker.

Warranty: 12 Year Transferable + Lifetime. Dims/Weight: 14" Diameter, 37" Tall, 43 lbs.

Accessories: All MD accessories and kits are

compatible and are sold separately.

Optional: Air Relief Valve, Mufflers.

INSTALLATION

Electrical:

240V - 50/60HZ, 15 amp circuit. Separate circuit recommended. 6' Cord with typical 240v plug. Fits NEMA 6-20R receptacle.

Mounting:

Two-stud 17" wide bracket. Easy to hang and remove. Left/right variable positioning. Mount 6" off ground. Leave 24" above unit.

Venting:

Exterior venting not necessary.

30ft maximum dual line if venting.

| PROJECT | LOCATION |
|---------|--------------|
| DEALER | DATE / PRICE |

